Media: air - gas
Inlet Pressure: 30 Bar max
Pressure range: 0.5 – 30 Bar
Media temp: -10°C - +70°C
Ambient temp: -10° to +70°C
Mounting: upright (USR any)



Stainless F R L

1/4 – 1/2
316 Stainless Steel
Manual, Semi, Fully Auto Drain
0.5 – 30 Bar

TYPE USFRL02-03-04

PRESSURE

Ø Port BSP	Max Flow Air L/min @ 6Bar (ANR)	Kg	Pressure (Bar) ΔP Min	Pressure (Bar) ΔP Max	Combination	Part Number	
1/4(02) 3/8(03) 1/2(04)	2080,2200,2500	3.8	0.5	12	F/R+L	USFR/LB + port	
			12	30		USFR/L + port	
	2200,2500,3800	2	0.5	12	Filter/Regulator	USFRB + port	
			12	30		USFR + port	
	2440,2450,3030	1.65	0.5	30	Filter	USF + port	
	1950,2250,2520		0.5	12	Regulator	USRB + port	
		1.4	12	30		USR + port	
	2500,2525,4100	1.75	0.5	30	Lubricator	USL + port	

OPTIONS

5 Micron SUS316 Filter Element (USFRL, USFR + USF)
40 Micron SUS316 Filter Element (USFRL, USFR, USF)
Semi-Automatic drain (S) below 0.5 bar (USFRL, USFR, USF)
Fully Automatic Drain (D) (USFRL, USFR, USF)
Pressure Gauge, Blanking Plug, Mounting Bracket and Screws (USFRL, USFR, USR)
NPT Thread

CONSTRUCTION

Body, Regulator, Filter (110cc) Lubricator (130cc) Bowl, Filter Elements, Mounting Bracket, Blanking Plug: 316 Stainless Steel
Pressure gauge: cover 304 Stainless Steel / Thread 316 Stainless Steel
O rings: Viton
Test Pressure: 60 Bar

OVERALL DIMENSIONS

USFRL

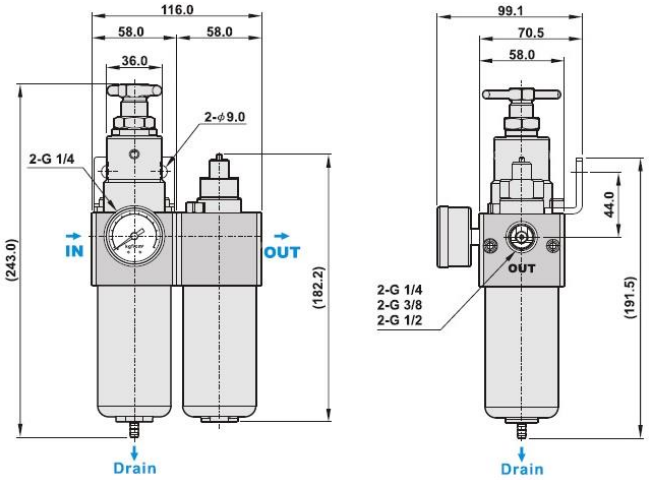

USFR

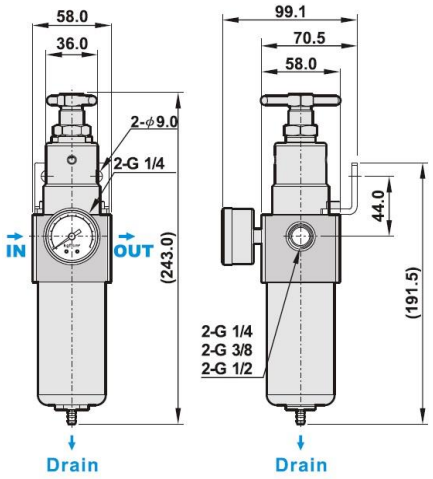

USF

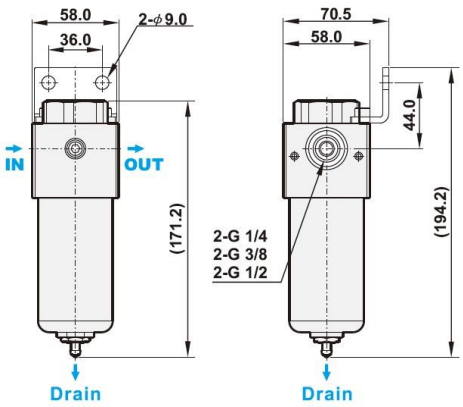

USR

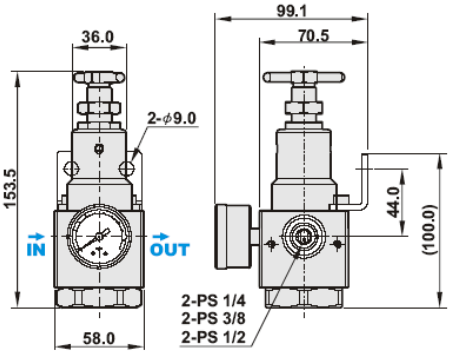

USL

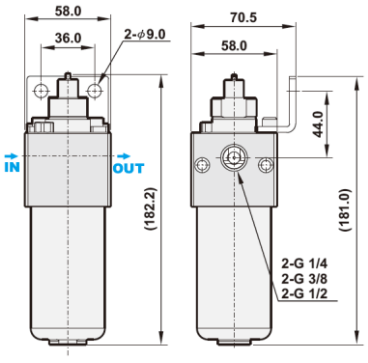

© Copyright (for Teignflex 7) whole or partial reproduction of this catalogue or page without written consent is strictly prohibited.